


Punte elicoidali integrali senza rompitruciolo.
Solid carbide spiral milling cutters without chip breaker.
Fraises hélicoidales monobloc en carbure sans brise-copeaux.
Stabiler vollständiger spiraler Fräsen-Schneider ohne Span Unterbrecher.

Broca helicoidal en MD integral sin rompiviruta

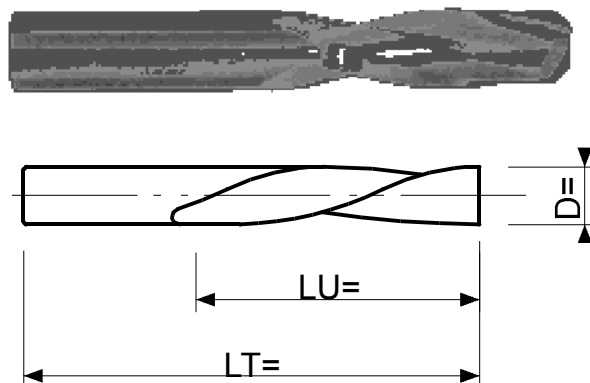

CODICE DX POS.	CODICE SX POS.	CODICE DX NEG.	CODICE SX NEG.	senza rompitruciolo			
				Ø D =	LU =	LT =	Z =
2212.102	2212.202	2212.302	2212.402	3	12	50	2
2212.104	2212.204	2212.304	2212.404	4	12	50	2
2212.106	2212.206	2212.306	2212.406	5	17	50	2
2212.108	2212.208	2212.308	2212.408	6	17	50	2
2212.110	2212.210	2212.310	2212.410	6	22	60	2
2212.112	2212.212	2212.312	2212.412	6	27	60	2
2212.114	2212.214	2212.314	2212.414	8	22	70	2
2212.116	2212.216	2212.316	2212.416	8	32	70	2
2212.118	2212.218	2212.318	2212.418	10	27	70	2
2212.120	2212.220	2212.320	2212.420	10	32	70	2
2212.122	2212.222	2212.322	2212.422	10	42	90	2
2212.124	2212.224	2212.324	2212.424	12	32	80	2
2212.126	2212.226	2212.326	2212.426	12	42	100	2
2212.128	2212.228	2212.328	2212.428	12	52	100	2
2212.130	2212.230	2212.330	2212.430	14	32	80	2
2212.132	2212.232	2212.332	2212.432	14	42	100	2
2212.134	2212.234	2212.334	2212.434	14	52	100	2
2212.136	2212.236	2212.336	2212.436	16	32	80	2
2212.138	2212.238	2212.338	2212.438	16	42	100	2
2212.140	2212.240	2212.340	2212.440	16	52	100	2
2212.142	2212.242	2212.342	2212.442	18	42	100	2
2212.144	2212.244	2212.344	2212.444	18	52	100	2
2212.146	2212.246	2212.346	2212.446	20	42	100	2
2212.148	2212.248	2212.348	2212.448	20	52	100	2
2212.150	2212.250	2212.350	2212.450	20	62	120	2
2212.152	2212.252	2212.352	2212.452	20	72	130	2
2212.154	2212.254	2212.354	2212.454	20	92	150	2